

CRAY J90™ Series DDS-30 Upgrade Procedure

HMU-190-A

Cray Research Proprietary



Cray Research, Inc.

Record of Revision

REVISION	DESCRIPTION
----------	-------------

	August 1995. Original printing.
A	December 1995. Revised to correct SI-3X jumper settings.

Any shipment to a country outside of the United States requires a letter of assurance from Cray Research, Inc.
--

This document is the property of Cray Research, Inc. The use of this document is subject to specific license rights extended by Cray Research, Inc. to the owner or lessee of a Cray Research, Inc. computer system or other licensed party according to the terms and conditions of the license and for no other purpose.

Cray Research, Inc. Unpublished Proprietary Information — All Rights Reserved.

Autotasking, CF77, CRAY, CRAY-1, Cray Ada, CraySoft, CRAY Y-MP, HSX, MPP Apprentice, SSD, SUPERSERVER, UniChem, UNICOS, and X-MP EA are federally registered trademarks and
Because no workstation is an island, CCI, CCMT, CF90, CFT, CFT2, CFT77, ConCurrent Maintenance Tools, COS, CRAY-2, Cray Animation Theater, CRAY APP, CRAY C90, CRAY C90D, Cray C++ Compiling System, CrayDoc, CRAY EL, CRAY J90, Cray NQS, Cray/REELlibrarian, CRAY S-MP, CRAY SUPERSERVER 6400, CRAY T3D, CRAY T90, CrayTutor, CRAY X-MP, CRAY XMS, CRInform, CRI/TurboKiva, CS6400, CSIM, CVT, Delivering the power . . ., DGauss, Docview, EMDS, HEXAR, IOS, LibSci, ND Series Network Disk Array, Network Queuing Environment, Network Queuing Tools, OLNET, RQS, SEGLDR, SMARTE, SUPERCLUSTER, SUPERLINK, System Maintenance and Remote Testing Environment, Trusted UNICOS, and UNICOS MAX are trademarks of Cray Research, Inc.

Requests for copies of Cray Research, Inc. publications should be directed to:

CRAY RESEARCH, INC.
Logistics
6251 South Prairie View Road
Chippewa Falls, WI 54729

Comments about this publication should be directed to:

CRAY RESEARCH, INC.
Hardware Publications and Training
890 Industrial Blvd.
Chippewa Falls, WI 54729

CRAY J90 Series DDS-30 Upgrade Procedure

Device to Be Upgraded	3
Description of Upgrade	3
DDS-30 Upgrade Prerequisites	3
Training Requirements	4
ESD Precautions	4
ESD Smock	4
Wrist Strap	5
Reference Publications	5
Estimated Time to Install Upgrade	5
Parts Required	6
Tools Required	6
Software Required	7
Conventions	7
Getting Started	8
Create a Backup Copy of the UNICOS File System ...	8
Power Down the CRAY J90 Series System	8
Hardware Upgrade Procedure	9
Remove the I/O Cabinet Rear Door	9
Remove the I/O Cabinet Front Door	9
Gain Access to the Side of the I/O Cabinet	9
Install the PE-30S Slides	11
Install the PE-30S Tray	12
Install the SI-3 Controller	13
Make VME Bulkhead Plate Connections	16
Connect the Power, Control, and SCSI Cables to the Rear of the PE Tray	17
Install Cable Retractor	18
Route Cables through Cable Retractor	20

Disconnect all Cables from VME Bulkhead	21
Route Cables through Cable Tray and Flexible Cable Way	23
Replace Side Panels or Push Cabinets Together	25
Replace Front I/O Door	25
Replace Rear I/O Door	25
Power Up the System	26
Edit the IOS Configuration File	27
Verify That the Upgraded Hardware is Functional	27
Software Configuration Preparation	29
IOS Information	30
Disk Configuration	30
Disk Configuration - Logical Definition	32
Software Change Procedure	34
Disk Device Integration	36
Removed Parts Disposition	37
IR Reporting	37

Getting Started

Device to Be Upgraded

This document contains procedures on how to add a small computer system interface (SCSI) disk drive subsystem (DDS-30) to a CRAY J90 series system.

Description of Upgrade

Cray Research customers have the option of adding additional disk storage to their CRAY J90 series systems by upgrading the number of SCSI peripheral trays (PE-30S) in their system. This procedure is written to aid CRI support personnel in the task of installing DDS-30 upgrades. You may want to check off each step of this procedure as you complete it.

Following the instructions presented in this upgrade procedure provides the CRAY J90 series system with added operational DDS-30 disks. The software upgrade procedure creates two TEMPORARY scratch file systems on these new disks. It is then the responsibility of the customer to integrate these disks into his or her existing CRAY J90 series system disk configuration. The “Disk Device Integration” section, near the end of this document, provides some pointers to useful disk integration information.

DDS-30 Upgrade Prerequisites

The following list describes some special configuration considerations:

- It is recommended that the “Software Configuration Preparation” of this upgrade be completed prior to taking dedicated maintenance time on the system. This step involves configuring the new disks into temporary scratch file systems that can be completed while the system is in multiuser mode prior to the upgrade.

The customer may also want to prepare a production version UNICOS configuration (`param`) file prior to the upgrade in order to integrate these new disks into the existing CRAY J90 series system disk configuration. This `param` file will then be available for the “Disk Device Integration” section of this upgrade.

- It is recommended that a full backup of existing file systems be completed before this upgrade is started.


- The maximum number of SI-3 controllers per IOS is three if no network controllers reside on the same IOS. Decrement the maximum by 1 for each network controller in that IOS.
- Procedures for integrating new disks with existing file systems are located in Section 5 of the *UNICOS Basic Administration Guide for CRAY J90 and CRAY EL Series*, Cray Research publication number SG-2416.

Training Requirements

Cray Research personnel who perform this upgrade must have completed training in CRAY J90 series hardware and system administration. If this is not possible, a hardware-trained person must have a system administrator available during this upgrade. Experience in upgrading or installing the UNICOS operating system on a CRAY J90 series system or CRAY Y-MP EL system is advised.

ESD Precautions

Observe ESD precautions during the entire upgrade process. Required apparel includes an ESD smock and an ESD wrist strap. Do not wear watches or jewelry when you work on a CRAY J90 series system cabinet.

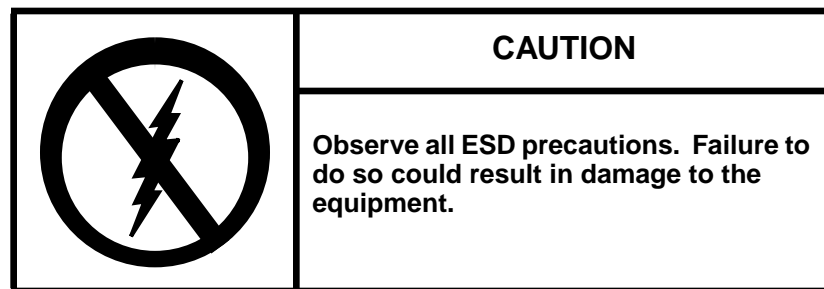

ESD Smock

Wear a Cray Research-approved static-dissipative smock when servicing or handling an ESD-sensitive device. Completely button the smock and wear it as the outermost layer of clothing. You must have a portion of the smock's sleeves in direct contact with the skin of your arms. Skin contact is essential for a dissipative path-to-earth ground through your wrist strap. Tuck hair that exceeds shoulder length inside the back of the smock.

Wrist Strap

Wear a Cray Research-approved wrist strap when handling an ESD-sensitive device to eliminate possible ESD damage to equipment. Connect the wrist strap cord directly to earth ground.

Reference Publications

Refer to the following publications if you have questions when performing this upgrade.

- *UNICOS Basic Administration Guide for CRAY J90 and CRAY EL Series*, Cray Research publication number SG-2416
- *CRAY IOS-V Commands Reference Manual*, Cray Research publication number SR-2170
- *CRAY IOS-V Messages*, Cray Research publication number SQ-2172
- *Automated Confidence Testing*, Cray Research publication number HDM-110-0
- *CRAY J916 Service Manual Kit*, Cray Research publication number HMK-101-0
- *UNICOS Installation and Configuration Tool Reference Manual*, publication number SR-3090

Estimated Time to Install Upgrade

[Table 1](#) divides the DDS-30 upgrade process into four separate procedures. Use this table to determine how much system time you should request to complete this upgrade.

NOTE: It is recommended that you contact the customer and request that he or she complete a full backup prior to this upgrade.

Table 1. Estimated Times to Install Upgrade

Install Task	Estimated Time to Install Upgrade
Hardware Install	4 hours
Hardware Verification Testing	1 hour
Software Configuration	1 hour
Software Verification Testing	1/2 hour

Parts Required

Table 2. PE30S Kit Contents

CRI Part Number	Quantity	Description
90360800	1	Module Assembly, SI-3 (DC-6S)
90399900	1	Drive Tray Kit, PE-30S
90141400	8	Clip Nut 1/4-20
90054600	6	Clip Nut, Captive 10-32
90141500	8	Screw, Sem Pan Head Phillips 1/4-20×1/2
90307200	1	Cable Carrier, Steel
90029200	2	Screw, Sem Pan Head Phillips 10-32×3/8
90307100	1	Power Cord, Universal, 10 Amp
90266200	2	Terminator, Differential, 68 Position, Low Profile
90307000	1	Harness Assembly, Controller, External
90272200	2	Harness Assembly, SCSI-3, Bulkhead-Device
90317400	2	Cable Assembly, Intermediate SCSI-3
90360701	2	Plate Assembly, 68 Pin
90202400	2	Screwlock Kit, Female
90205300	1	Adhesive, Threadlock
90029000	4	Screw, Sem Pan Head Phillips 6-32×1/4
90030502	10	Cable Tie, Mounting Nylon 8 in.
90030500	15	Cable Tie, Mounting Nylon 4 in.
90154100	4	Screw, Truss Head Phillips 10-32×1/2SS
90306600	1	Filter Assembly, Air
90441400	1	Shipping Container

Tools Required

Most of the tools required for performing upgrades are common hand-held tools that are included with the Customer Service toolkit. You may need a small hammer, which is not included in this toolkit.

Software Required

- Minimum IOS kernel revision - 1.3
- Minimum UNICOS revision - 8.0.3.2J
- Special considerations: Support for configuring the UNICOS dump device (`/dev/dsk/dump`) on a DD-6S device is not included until the UNICOS 8.0.4 release. DD-6S devices are otherwise fully supported in UNICOS 8.0.3.2J. The “mfdump.DD6S” getfix package must be applied to systems running the 8.0.3.2J release if `mfdump` support for DD-6S devices is required. The IOS `dstat` command provides an incorrect value for the number of blocks on a DD-6S device in the 8.0.3.2J release. This is fixed in the 8.0.4 release of UNICOS.

Conventions

The following conventions are used throughout this document:

<u>Convention</u>	<u>Meaning</u>
<code>command</code>	This fixed-space font denotes literal items such as commands, files, routines, path names, signals, messages, and programming language structures.
<code>manpage(x)</code>	Man page section identifiers appear in parentheses after man page names.
<i>variable</i>	Italic typeface denotes variable entries, words or concepts being defined.
user input	This bold fixed-space font denotes literal items that the user enters in interactive sessions. Output is shown in nonbold, fixed-space font.
<KEY>	This convention indicates a key on the keyboard.

Getting Started

Create a Backup Copy of the UNICOS File System

It is recommended that you create a backup copy of the UNICOS file system before you proceed with the upgrade procedures. Refer to the *UNICOS Basic Administration Guide for CRAY J90 and CRAY EL Series*, publication number SG-2416, for details on how to create a backup copy of the UNICOS file system.

Power Down the CRAY J90 Series System

1. Ensure that the customer has brought the system to single-user mode.
2. Using the right mouse button, click on any open working space. The `Workspace` menu will appear.
3. From the `Workspace` Menu, select the `J90 Console` menu item.

NOTE: You must have superuser privileges to perform [Step 4](#).

4. Log into the UNICOS operating system by entering `<CONTROL-a>` to get a UNICOS prompt and enter the root login and password.
5. Shut down the UNICOS operating system by entering the following commands at a UNICOS prompt:

```
# cd /
# /etc/shutdown 120      (takes 120 seconds to execute)
# /bin/sync
# /bin/sync
# /bin/sync
# /etc/ldsync (if you are using ldcache)
```

6. Stop the J90 Console connection by entering the following commands:

```
# <CONTROL-a>(toggles to the IOS)
sn9xxx-ios0> mc
sn9xxx-ios0> reset (takes 30-45 seconds to execute)
BOOT[sn9xxx-ios0]> ~. <CONTROL-c>
```

7. Open the mainframe cabinet door.
8. Power off the system by pressing the CCU SYSTEM OFF button.

Hardware Upgrade Procedure

Remove the I/O Cabinet Rear Door

1. At the rear of the I/O cabinet, turn the two door fasteners 1/4-turn counterclockwise with a 5/32-in. allen wrench.
2. Grasp the door handle and swing the door open to the right.
3. Remove the screw that connects the green and yellow ground wire to the I/O cabinet.
4. Lift the door up about 1 in. (2.54 cm) and remove the I/O cabinet rear door from its hinges.

Remove the I/O Cabinet Front Door

1. At the front of the I/O cabinet, push down on the latch and swing the door open.
2. There is a cable that prevents the door from swinging back. Remove the retaining screw that attaches the ground wire cable to the I/O cabinet.
3. Lift up and remove the I/O cabinet front door from its hinges.

Gain Access to the Side of the I/O Cabinet

1. Remove the I/O cabinet side panel if only one I/O cabinet is located on each side of the mainframe cabinet.
 - a. Carefully pry the eight screw covers from the side panel using a very thin, strong pry or knife blade.
 - b. Loosen the eight captive screws that were revealed in the previous step.
 - c. Lift off the panel and set it aside.

If you have a system that includes two I/O cabinets on the same side, you will have to separate the cabinets if the upgrade is being installed into the inner cabinet. Use the following procedure to separate the cabinets.

2. Raise the levelers on the I/O and mainframe cabinets.
3. Remove the three frame-joining screws from the frame joiners on the I/O cabinet.
4. Disconnect Y1 cables and HIPPI cables from mainframe processor modules.
5. Disconnect the alarm cable in the mainframe cabinet.
6. Disconnect the CCU signal cable in the mainframe. You will have to remove the mainframe AC power assembly to do this.
 - a. Remove the four Phillips screws that secure the AC power assembly to the mainframe cabinet.
 - b. Grasp the AC power cord at the incoming AC power assembly and pull out slightly until the sides of the AC power assembly clear the chassis.
 - c. Slide the power assembly out of the mainframe cabinet until the Hubbell Twist-Lock plugs, located at the rear of the power assembly, are accessible. Disconnect the Hubbell Twist-Lock plugs.
 - d. Remove the entire power assembly from the mainframe cabinet and set it on the floor.
 - e. Remove the CCU signal cable from the J2 connector.
 - f. Replace the AC power assembly.
7. Separate and pull apart the cabinets.
8. Move the I/O cabinet so that the protruding flanges move back and away from the mainframe cabinet frame.
9. Insert the frame-joining screws on the I/O cabinet.

Install the PE-30S Slides

Install the PE-30S tray in the lowest available 3U (units) position. The “U” numbers are the numbers on the front of the I/O cabinet frame. These numbers are also used to label the SCSI cables attached to the rear of the PE tray. You must use the lowest position to prevent the cabinet from becoming top-heavy.

1. Remove the four screws from the filler plate that covers the empty position to be occupied by the new PE-30S tray. Additional filler plates may need to be removed if access space is desired for the upgrade. Retain the four screws to secure the new tray.
2. Place four large clip nuts (P/N 90141400) on each side of the cabinet (refer to [Figure 1](#)); there are eight clip nuts that will be used for installing the tray slides.
 - a. Place a clip nut into the 4th hole up from the clip nut of the last drive tray slide. Refer to [Figure 1](#).

NOTE: The following exception to the above step exists if you are installing a tray immediately above the VME chassis: You should insert the clip nut on the 7th hole up from the VME chassis slide.

- b. Install the upper clip nuts into the 5th hole above the lower clip nut. Refer to [Figure 1](#).
 - c. **IMPORTANT!** Align each clip nut by centering it on the holes using a #2 Phillips screwdriver and inserting a screw in each clip nut before you install the slides.

NOTE: It may be necessary to use a small hammer to tap the clip nuts into place.

3. The back of the rail is the end with the rail stop. Place a slide against one side of the cabinet chassis over the clip nuts. Secure it with four 1/4-20 x 1/2 Phillips screws (P/N 90141500). Do not tighten these screws until all four screws have been started.

NOTE: Ensure that the slides are pushed up as far as possible to prevent interference with the tray located below the tray being installed.

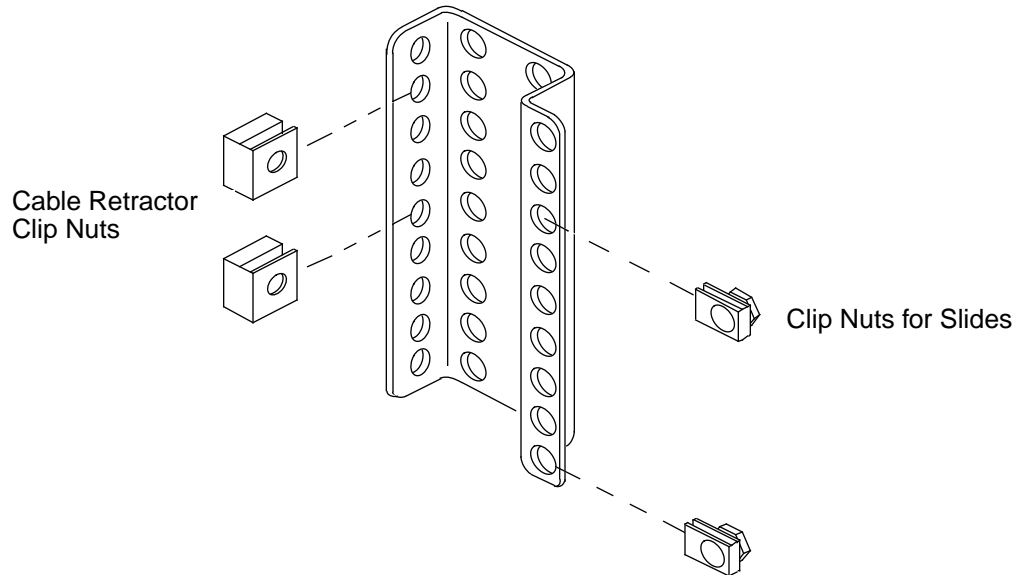


Figure 1. Clip Nut Locations on Chassis Rails

4. Place the other slide on the other side of the cabinet and secure it with four Phillips screws.
5. Tighten all eight screws.

NOTE: The slides are greasy. You may want to wash your hands after working with the slides.

Install the PE-30S Tray

NOTE: The inside slides come installed on the PE tray.

CAUTION
<p>The PE-30S is heavy and lifting it may cause a back injury or damage to components if dropped. Use two people to lift this tray. If this is not possible, it is recommended that you remove individual disk drives from the tray to make the PE tray lighter.</p>

1. Extend the inner part of the slides.
2. Before installing the PE-30S into the system cabinet, ensure that all screws securing the top cover of the PE tray are tightened.

3. Slide the PE-30S onto the newly mounted slides in the I/O cabinet. You may have to slide the ballbearing section to the front in order to get the tray to slide onto the ballbearing section of the slides. You may also need to push up on the rail backstop.

NOTE: If the new tray interferes with the PE below, some adjustments of the rails will be necessary.

4. Install, on the front of the PE-30S tray, one of the screws that was removed from the cover plate to keep the tray in position while you work at the rear of the cabinet.
5. Snap the air filter onto the front of the PE tray.

Install the SI-3 Controller

Insert the new SI-3 controller into the correct IOS, using the next available slot in that IOS. The position of this new controller depends on the customer's system configuration.

1. Pull out the VME chassis tray.
 - a. Remove the four screws that secure the IOS tray to the cabinet.
 - b. Pull out the VME tray as far as it will go.
 - c. Release the 14 1/4-in. captive screws that hold the top plate to the IOS tray.
 - d. Remove the top plate of the VME tray and set it aside.
2. Unpack the new controller board (P/N 90360800).
3. Place the new board on an ESD-protected surface.
4. Change any jumpers necessary on the new SI-3 controller board. Refer to [Figure 2](#).
5. Remove the VME slot filler.
6. Insert the new controller board into the guide slots in the IOS chassis and ensure that the board is completely seated.

7. Attach the male end of the SI-3 cables (P/N 90317400) to the front of the SI-3 controller. The port closest to the front of the VME is port 0, and the port closest to the back of the VME is port 1. Port 0 is physically connected to J2 at the back of the PE tray, and port 1 is connected to J4.

NOTE: Controller cables are labeled with the VME slot number (C1 through C20) and the port numbers (either 0 or 1); for example, C5 Port 0. These labels are located in the document holding tray just below the CPU card cage in the mainframe cabinet.

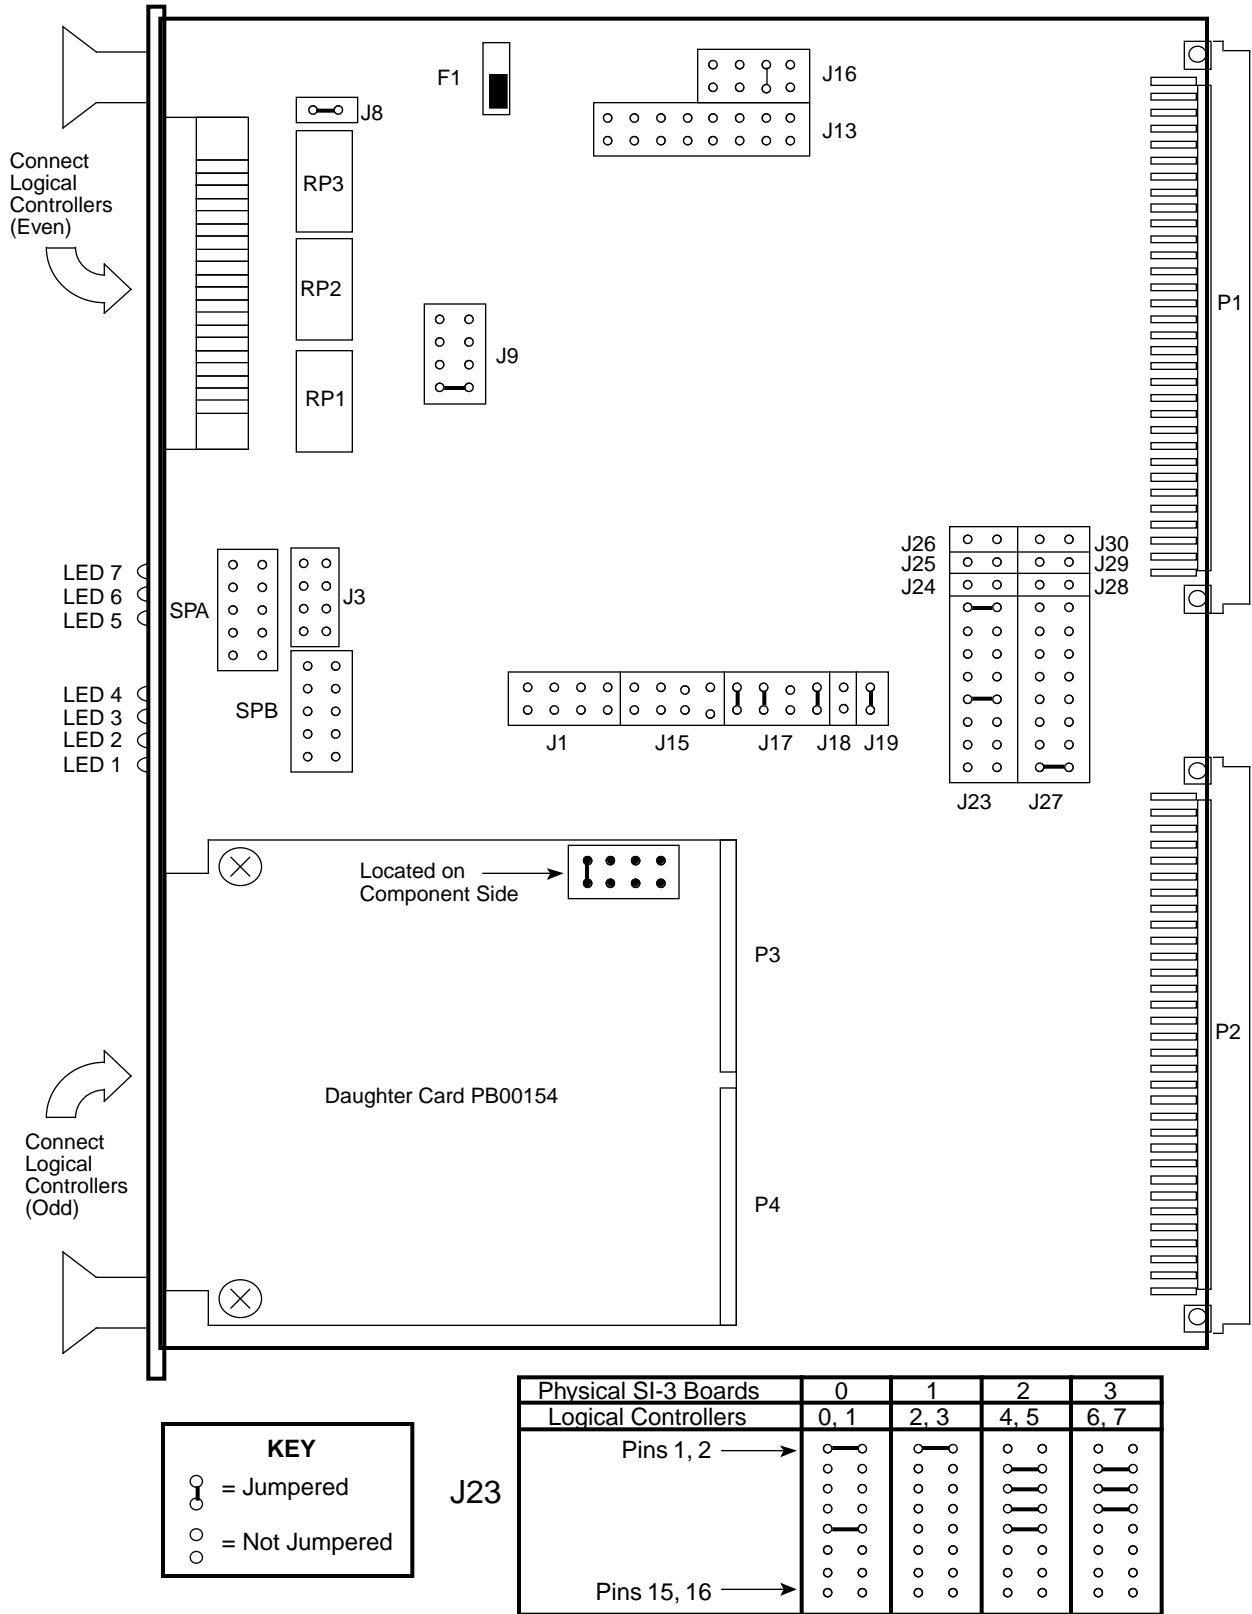


Figure 2. SI-3 Jumper Configurations

Make VME Bulkhead Plate Connections

NOTE: Try to use a location on the bulkhead that is in line with the newly installed IOS controller card to minimize the crossing of cables. Refer to [Figure 3](#).

1. Push the VME tray in and secure it with a single screw.
2. Push out the PE tray above the VME to gain better access.
3. Remove the two appropriate bulkhead plates that are each attached to the bulkhead by two screws.
4. Install the new plates (P/N 90360701) and secure them with the two screws removed from the blank plates.

NOTE: Ensure that the plate's gasket is positioned away from the metal mesh of the adjacent plate.

5. Attach the other end of the SI-3 cable to the VME bulkhead using two standoff screws (P/N 90202400) for each cable.

NOTE: Ensure that the standoff screws are seated into the bulkhead plate before you tighten them. As viewed from the back, port 0 is connected to the left of the port 1 connector. Orient the connector so that D points to the right.

6. Use a small amount of thread adhesive (P/N 90205300) on the threads of each standoff screw.
7. Tighten the standoff screws lightly with a nut driver and ensure proper seating.
8. Secure the tray above the VME if it was extended.

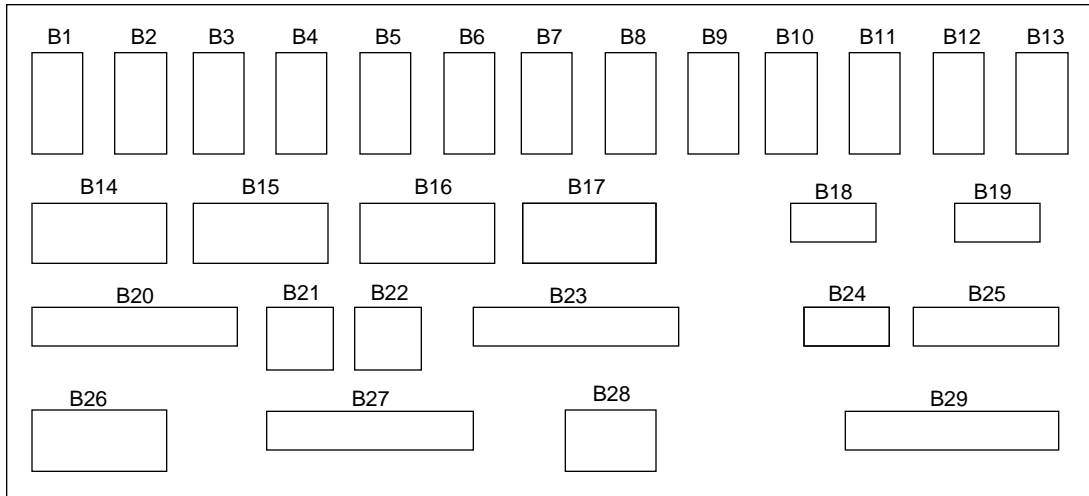


Figure 3. VME Bulkhead

Connect the Power, Control, and SCSI Cables to the Rear of the PE Tray

1. Install the terminators (P/N 90266200) on the J1 and J3 connectors on the rear of the PE-30S tray. Refer to [Figure 4](#).

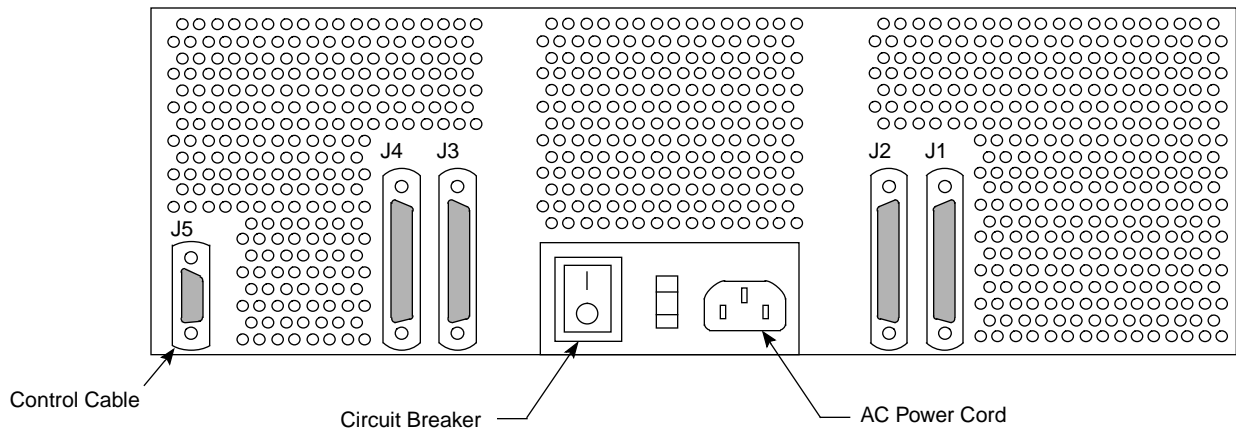


Figure 4. J1 and J3 Connections

2. Connect the power cable (P/N 90307100) into the power cord outlet on the rear of the PE-30S tray. Refer to [Figure 4](#).
3. Connect the control cable (P/N 90307000) into connector J5. Refer to [Figure 4](#).

4. Connect the SCSI cables (P/N 90272200) into connectors J2 and J4. Refer to [Figure 4](#).
5. Label the ends of the SCSI cables with the J designator (J2 or J4) on the end connected to the PE tray. Also attach a label using a U designator (U1, U2, etc) to each cable to designate the drawer start. Place the B VME bulkhead designator on the other end. J2 connects to DC-5I port 0, and J4 connects to SI-3 port 1 at the VME bulkhead.

Install Cable Retractor

Refer to [Figure 5](#) for an illustration of the cable retractor (P/N 90307200).

1. At the rear of the cabinet on the left side, install small clip nuts in the 5th and 8th holes up from the previous tray or on the 6th and 9th holes up from the previous cable retractor.

NOTE: In order to have easier access, it may be necessary to unplug a cable from the power and distribution rail.

2. Install the cable retractor arm on the clip nuts using two Phillips screws inserted into the top and bottom holes of the cable retractor.

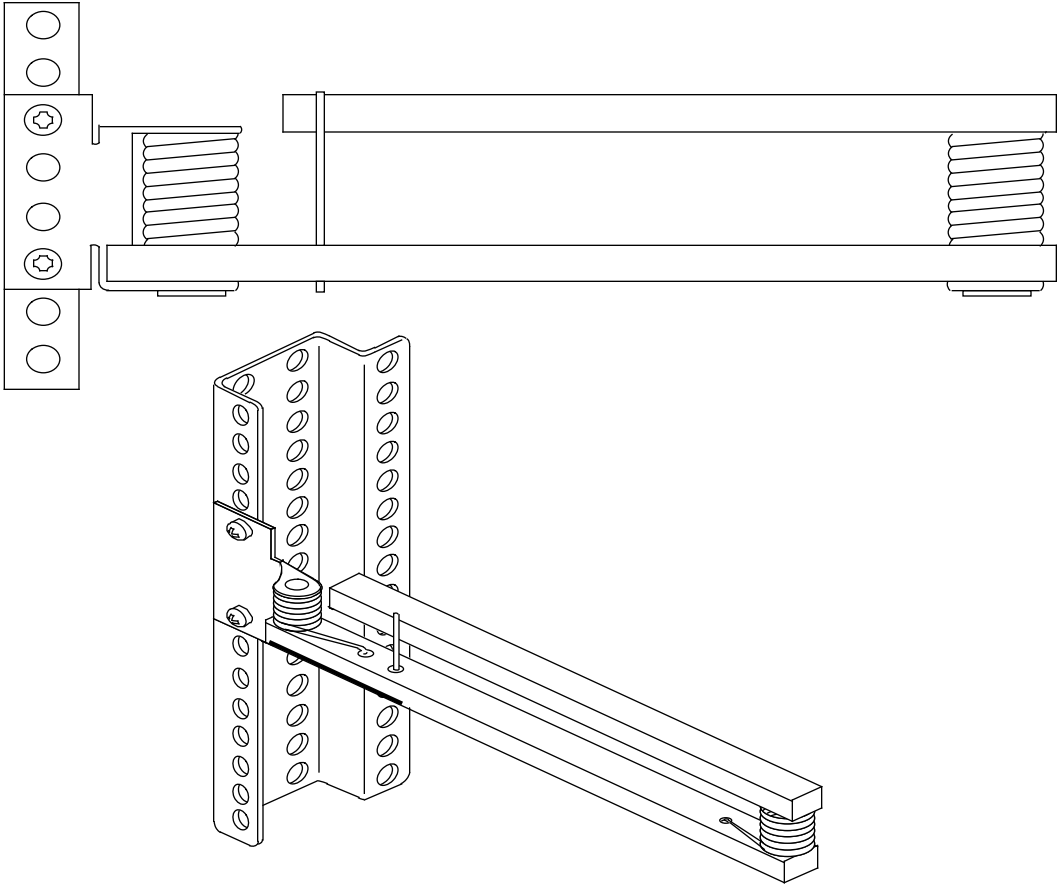


Figure 5. Cable Retractor

Route Cables through Cable Retractor

If you are installing a PE tray in the lower units of an I/O cabinet, it may be necessary to remove the I/O bulkhead. Refer to the *CRAY J916 Service Manual Kit*, Cray Research publication number HMK-101-0, for procedures on how to remove and replace the bulkhead.

1. Remove the single retaining screw and extend the new PE-30S tray about 6 inches (15.2 cm).
2. The following list describes the suggested slack for the cables.
 - J2 is 14 inches (35.6 cm)
 - J4 is 9 inches (22.9 cm)
 - Power connection is 12 inches (30.5 cm)
 - Remote alarm cable is 7 inches (17.8 cm) (J5 at back of PE-30S)
3. Route the power, control, and SCSI cables from the rear of the new PE-30S tray through the cable retractor. Ensure that there is adequate slack between the cable retractor and the drive connection to allow the tray to be fully extended.
4. Loosely install, but do not tighten, three tie wraps (P/N 90030502) on each side of the cable retractor to keep the cables in place and to allow for adjustments of cable end lengths later.
5. Connect the power cable to the most convenient outlet on the power and control distribution rail.
6. Connect the control cable to the most convenient 9db connectors on the power and control distribution rail.
7. The power and control cables need to be folded back on the cable retractor to take up any excess slack. Use cable ties and the holes in the cable retractor to secure the power and control cables.
8. Adjust cable lengths and tighten the tie wraps.

Disconnect all Cables from VME Bulkhead

1. Disconnect all cables from the VME bulkhead that are routed through one or both of the two flexible cable ways.

NOTE: Whether one or both of the flexible cable ways are disconnected depends on the number of cables being routed and where the cables will be attached on the VME bulkhead.

2. Disconnect the flexible cable ways by removing the two screws that secure them to the VME tray. Refer to [Figure 6](#).
3. Lay the cable ways flat.
4. Loosen the two 1/4-turn screws at the front of the I/O cabinet just below the VME tray.
5. Remove the single screw from the front of the VME.
6. Extend the VME tray completely.
7. Remove the cable tray cover by sliding the cover out through the front of the I/O cabinet and set it aside.

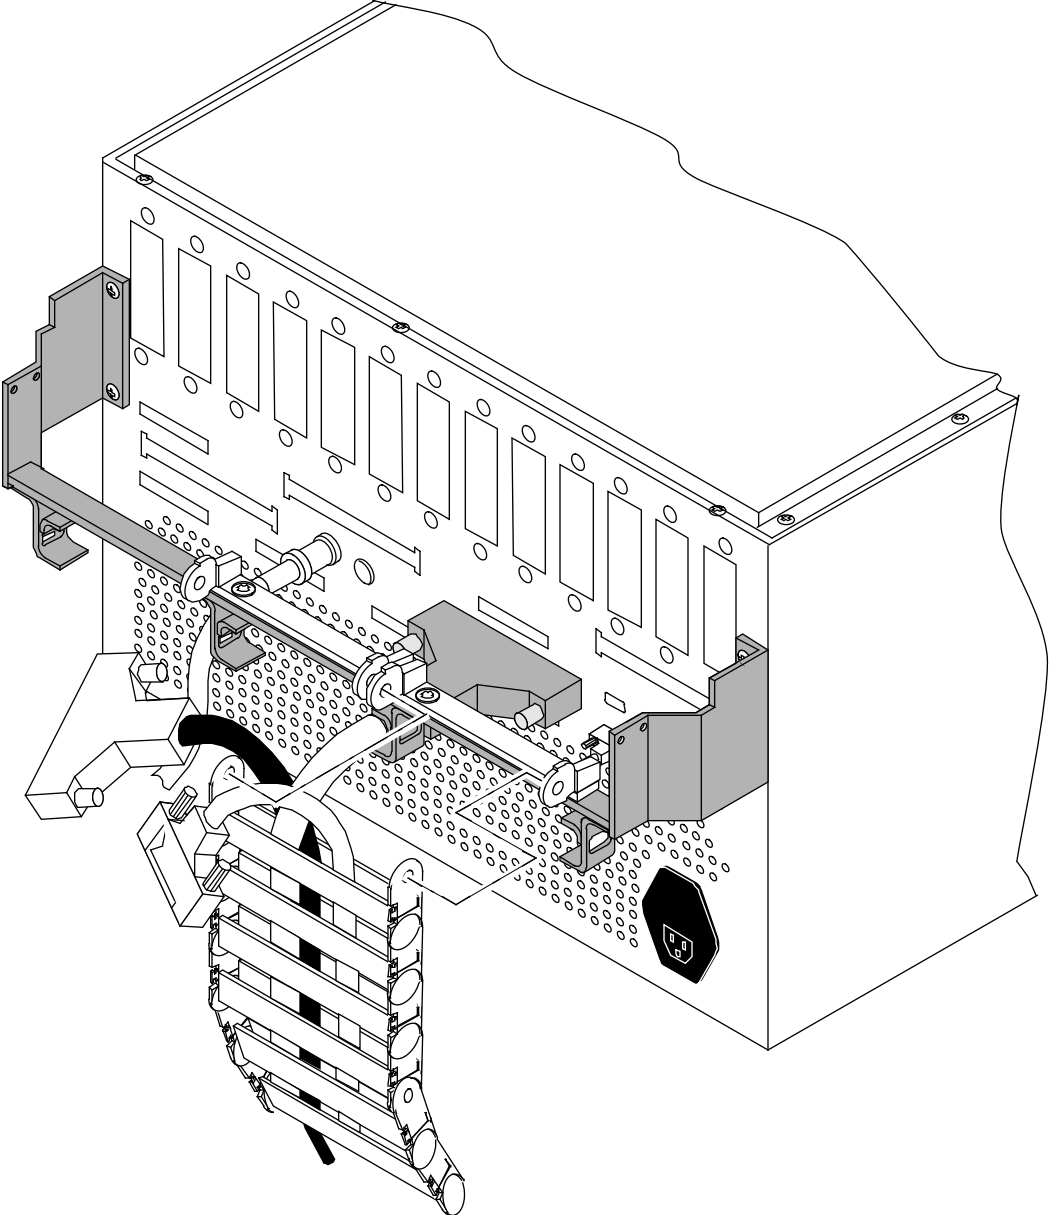


Figure 6. Flexible Cable Way

NOTE: If the DDS-30 cables will be routed through only one of the two flexible cable ways, only the crossbars for that flexible cable way need to be opened. If cables will be routed through both of the flexible cable ways, both crossbars will have to be opened.

8. Pry open each crossbar of the cable way, using a standard 1/8-in flat-bladed screwdriver and leave the inner side attached. Refer to [Figure 7](#).


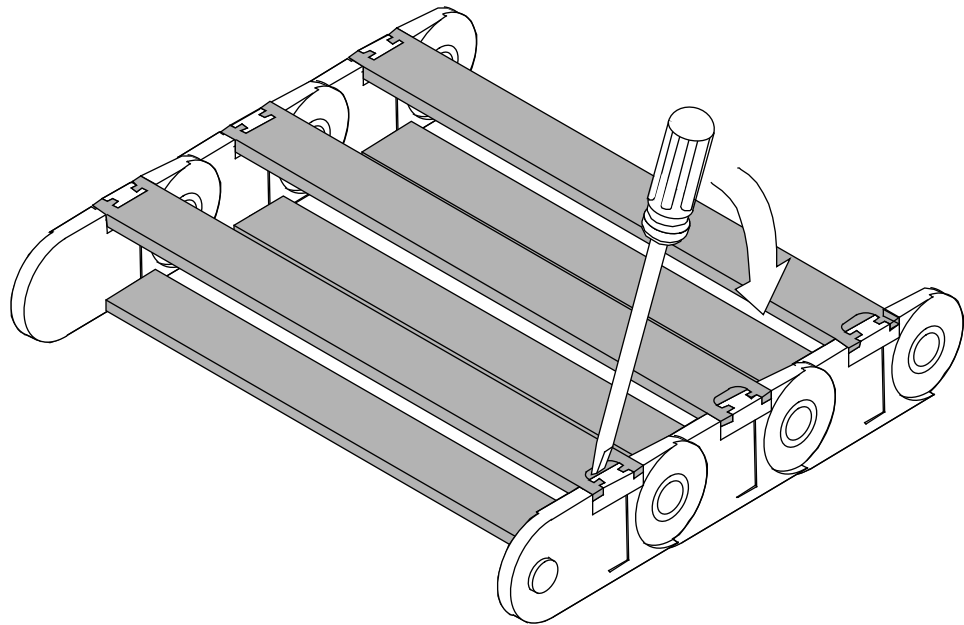


Figure 7. Flexible Cable Way Crossbars

Route Cables through Cable Tray and Flexible Cable Way

1. Route the SCSI cables down or up the side of the I/O cabinet next to the power and control distribution rail and secure them with tie wraps.
2. Place the SCSI cables in the flexible cable way and in the cable-routing tray beginning with the lowest tray installed with this upgrade. Ensure that the cables do not cross in the flexible cable way because this will make adjusting the cables more difficult.
3. After the cables have been routed, loosely secure the SCSI cables with tie wraps.
4. Snap down all crossbars for the flexible cable way. (This is not easy!) Then, ensure that both ends of each crossbar are secure.

5. Slide the VME tray into the cabinet carefully and secure it with one screw.

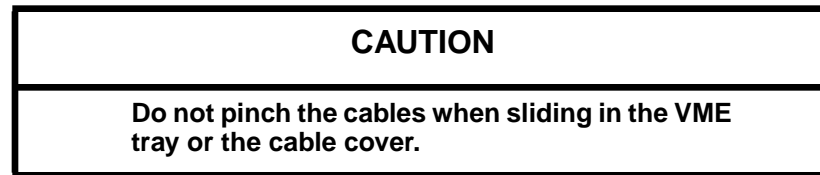

NOTE: Y1, power, and control cables are routed below the VME flexible cable-way attachment bar.

6. Reconnect the flexible cable way using the two screws originally removed from the flexible cable-way bar. Refer to [Figure 6](#).
7. Reattach the Y1 cables to the VME bulkhead.
8. Reattach the rest of the cables to the VME bulkhead using cable and bulkhead labels.
9. Remove the single retaining screw and extend the VME tray out until the tray slides lock.
10. Adjust the cables inside the cable tray and flexible cable way if there is excess slack at the VME bulkhead.
11. Tighten all tie wraps.
12. Reinstall the cable tray cover by sliding it carefully in and over the cable tray from the front of the I/O cabinet.
13. Secure the cable tray cover at the front of the I/O cabinet with two 1/4-turn screws.
14. Install the VME cover.
15. Slide the VME tray in.
16. Install the four screws in the front of the VME tray.
17. Install the remaining screws in the front of the PE-30S.

18. Turn on the power switches on the front and the rear of the PE-30S tray.

Replace Side Panels or Push Cabinets Together

1. Replace the side panels.
 - a. Place the side panel into the recess on the side of the cabinet.
 - b. Tighten the eight captive screws.
 - c. Replace the eight screw covers.

OR

1. Remove the three frame-joining screws from the frame joiners on the I/O cabinet.
2. Connect the cabinets.
 - a. Move the I/O cabinet so that the protruding flanges hook over the mainframe cabinet frame.
 - b. Insert and tighten the three I/O cabinet bracket screws that connect the cabinets.
 - c. Adjust the physical location of the cabinets, if necessary.
 - d. Reattach all inter-cabinet cables. You will have to remove and replace the AC power assembly to do this.
3. Lower the levelers on all cabinets so that the weight of each cabinet is distributed evenly.

Replace Front I/O Door

1. Place the door on its hinge pins.
2. Reattach the front door's cable wire to the I/O chassis.
3. Close the door.

Replace Rear I/O Door

1. Place the door onto the two hinge pins.

2. Reattach the green and yellow ground wire to the I/O cabinet.
3. Swing the door shut.
4. Turn the fasteners clockwise with a 5/32-in. allen wrench until the two circle symbols meet and the fastener is latched.

Power Up the System

NOTE: If the `J90 Console` window is already up, skip to [Step 3](#).

1. Using the right mouse button, click on any open working space. The `Workspace` menu will appear.
2. Select the `J90 Console` menu item.
3. Move the circuit breaker on the back of the I/O cabinet to the ON position first, and then move the circuit breaker on the mainframe cabinet to the ON position.
4. Press the `Alarm Acknowledge` button on the CCU.
5. Press the `CPU RESET` button on the CCU.
6. Press the `VME RESET` button on the CCU.
7. Verify that the `SYSTEM READY` light on the control panel illuminates.
8. Close the mainframe front door.
9. Watch the `J90 console` window to ensure that the system powers up correctly. If the `/diag/scripts/powerup` script exists on the IOS's file system, then this script will execute to test the IOBB. If no errors exist, the only output from this diagnostic is the message `Powerup IOBB test in progress`. You should see the `BOOT[sn9xxx-ios0]` prompt when power-up is complete.

Edit the IOS Configuration File

Open an xterm window on the system console and use the `vi` command to update the `/opt/ios/9xxx/config` file. The IOS definition section of `config`, which corresponds to the IOS that is receiving the new disk hardware, should contain the following entries (`/dev/si2` must precede `/dev/sdisk`):

Entry name	Entry definition
<code>/dev/disk</code>	The disk strategy module
<code>/dev/si2</code>	First SCSI disk driver module
<code>/dev/sdisk</code>	Second SCSI disk driver module

These are permanent additions. These entries may already exist in the given IOS section if that IOS already contains hardware that uses one or more of these modules. Each of these entries should be listed only once in an IOS definition section of the `config` file, but they should be listed in every IOS definition section that relates to an IOS receiving these disks.

Verify That the Upgraded Hardware is Functional

1. Load the IOS kernel by entering the following command (this step takes 3 to 30 minutes, depending on the number of peripherals in the system):

```
BOOT[sn9xxx-ios0]> load
```

2. Confirm that the new disks and controllers are correctly recognized in the output of the IOS `load` command. The following example is a partial sample of output for a DDS-30 subsystem:

```
SI-3ctrlr 0unit 0 [s00], type = DD6S
SI-3ctrlr 0unit 1 [s01], type = DD6S
SI-3ctrlr 1unit 0 [s10], type = DD6S
SI-3ctrlr 1unit 1 [s11], type = DD6S
```

The information in the `[sxy]` notation is used in Steps 6, 7, and 8. The `x` refers to the controller number within an IOS (0 and 1 in this example, corresponding to `eiop 20` and `eiop 21`, respectively). The `y` refers to unit or device number (0 and 1 in this example).

If all the new disks and controllers are not recognized, verify that the IOS configuration file was properly edited. If that file looks correct, verify that the hardware was properly installed by completing the following tasks:

- Examine all cable connections and terminators to make sure they are functional.
 - Examine all terminator pins to ensure that they are straight.
 - Verify that both the front and rear power enable switches on the new PE tray are enabled.
 - Verify that the LEDs on the SI-3 board are as follows: BDOK (board OK) LED is green; TPWR (termination power) LED is yellow.
3. The `bldact` IOS command, which you will be instructed to execute in Step 4, will prompt you for information about which Y1 channels are attached to each IOS. Make note of this channel information by viewing the `/sys/param` file before running the `bldact` command. The following type of line, which tells which Y1 channel (`channel 020`) is connected to which IOS (`cluster 0`), is in the `HARDWARE INFORMATION` section of the `/sys/param` file:

```
channel 020 is lowspeed to cluster 0;
```

4. Enter the `bldact` IOS command. This will update the `ACT frstload` script (`/diag/scripts/frstload`) as necessary with one call to the `dd5sql` diagnostic in each section of the script that relates to an IOS that contains DD-6S disk drives. The `bldact` command should take less than 1 minute to complete. The following is sample output:

```
sn9xxx-ios0> bldact
Build Automated Confidence Test script file, IOS-V version.
File /diag/scripts/frstload.
Is Y1 input channel 20 cabled to IOS 0? (y)es, (n)o: y
sn9xxx-ios0>
```

5. After the `bldact` script has completed, execute the newly created `frstload` script by hand to ensure it functions correctly. This will take several minutes to execute (the length of execution depends on the number and type of peripherals on the system). Execute the `frstload` script as follows:

```
sn9xxx-ios0> /diag/scripts/frstload
```

6. Run the `dd5stest` diagnostic on each IOS that has new DD-6S disks installed. The `dd5stest` diagnostic will prompt you for a controller number. The controller number is the value you noted in Step 2. Run test number 99 on each new drive to ensure that all possible tests are executed on each new drive. This will take about 5 minutes per drive.
7. Optional step: Do a surface analysis of the disk by entering the `dsurf` command. Use the output from the `load` command (Step 2) to get the correct device names for use on the `dsurf` command line (the disk type designator on the `dsurf` command line is `s` for DD-6S drives). This command will take approximately 30 minutes per drive to complete. For example:

```
sn9xxx-ios0> dsurf s02 -v1 1
```

8. Enter the following command once for each new drive to make a backup copy of the flaw table for each new drive. Use the output from the `load` command (Step 2) to get the correct device names for use on the `dflawr` command line:

```
sn9xxx-ios0> dflawr s00
```

Software Configuration Preparation

NOTE: This section may be completed prior to taking dedicated maintenance time on the system. If you have already completed this section, continue with the “Software Change Procedure” section on page 34.

Update and verify the UNICOS configuration file. Save a copy of the original version by entering the following commands:

```
sn9xxx-ios0> cd /sys
sn9xxx-ios0> cp param param.disk
```

The changes you will be making in the following “IOS Information” section should be considered permanent. Portions of the “Disk Configuration” section will reflect the temporary scratch file systems created in this upgrade procedure.

NOTE: The customer must integrate these disks into the existing CRAY J916 system disk configuration following completion of these upgrade procedures.

On the system console, use the `vi` command to update the `/opt/ios/9xx/sys/param.disk` file with the new disk information. Ensure that you update all appropriate information in the following subsections.

IOS Information

Note the IOP (cluster) where the SI-3 controller has been installed. Add the appropriate `eiop` value to the `cluster` definition statement for that IOP.

The `eiop` values for SI-3 disk controllers range between 20 and 25, inclusive. The first physical SI-3 disk controller board on an IOS will be assigned `eiop` values 20 and 21, correlating to the two SCSIbus ports on that SI-3 board. The second physical SI-3 disk controller board on that same IOS will be assigned `eiop` values of 22 and 23. The third physical SI-3 disk controller board will have `eiop` values of 24 and 25.

The following example cluster statement defines IOS 0 as having two SI-3 controller boards in it with disks, either DD-5S or DD-6S, attached to these two boards:

```
cluster 0 {
    muxiop; eiop 0; eiop 20; eiop 21; eiop 22; eiop 23;
}
```

These values are used regardless of the type of disk being controlled by the SI-3 board. One physical SI-3 controller contains two ports, 0 and 1, each of which connects to an independent SCSIbus. Each port is treated by the software as a separate logical SI-3 controller. SI-3 controller boards that are not controlling disks should not have associated `eiop` values included in the cluster statement.

Disk Configuration

If you need more information on disk configuration syntax, refer to the *UNICOS Basic Administration Guide for CRAY J90 and CRAY EL Series*, publication number SG-2416.

Add the appropriate information to define the new physical device configuration.

1. Specify the `cluster` (IOS) and `eiop` (logical controller) numbers. These are the same values chosen in the preceding “IOS Information” subsection.
2. Specify the `channel` using the Y1 channel value (in octal) that corresponds with the specified IOP cluster.

3. Specify the `type` parameter for DD-6S drives (DDS-30) to be DD6S.
4. The `unit` parameter will either be 0 or 1, signifying the two disk drives that are attached to that `eiop` (logical controller) number.
5. The capacity of each DD-6S drive is 2,389,000 sectors (1 sector = 4096 bytes).

You must use system-wide unique names and minor numbers for each physical device definition (`pdd`) statement for the new disks. Do not use existing names or `pdd` minor numbers. The name of the disk itself also must be unique throughout the entire UNICOS configuration file.

The following example shows possible physical device definition statements for one DDS-30 (four DD-6S drives on two logical controllers):

```
disk S30_100 {type DD6S; iopath{cluster 1; eiop 20; channel 040;} unit 0;
  pdd scratch_a0{minor 26; sector 0; length 500000 sectors;}
  pdd scratch_b0{minor 27; sector 500000; length 281000 sectors;}
}
disk S30_101 {type DD6S; ipath{cluster 1; eiop 20; channel 040;} unit 1;
  pdd scratch_a1{minor 28; sector 0; length 781000 sectors;}
}
disk S30_110 {type DD6S; ipath{cluster 1; eiop 21; channel 040;} unit 0;
  pdd scratch_b2{minor 32; sector 0; length 781000 sectors;}
}
disk S30_111 {type DD6S; ipath{cluster 1; eiop 21; channel 040;} unit 1;
  pdd scratch_b3{minor 30; sector 0; length 781000 sectors;}
}
```

Disk Configuration - Logical Definition

Add the appropriate information to define the logical devices that relate to the new physical devices.

1. You must use system-wide unique names and minor numbers for each logical device definition (`ldd`) statement relating to the new disks. You cannot use existing names or `ldd` minor numbers.
2. Following are possible logical device definitions for the temporary scratch file systems created in this upgrade procedure:

```

ldd scratcha {
  minor 20;
  pdd scratch_a0;
  pdd scratch_a1;
}
ldd scratchb {
  minor 21;
  pdd scratch_b0;
  pdd scratch_b2;
  pdd scratch_b3;
}

```

3. The values for `PDDMAX`, `PDDSLMAX`, and `LDDMAX` may require adjustment. Refer to the *UNICOS Basic Administration Guide for CRAY J90 and CRAY EL Series*, publication number SG-2416, for more information.

`PDDMAX` represents the maximum number of physical disks allowed. Physical disks are the disk entries in the param file. `PDDMAX` should be at least equal to the number of configured physical disk devices.

`PDDSLMAX` represents the maximum number of physical slices allowed. Physical slices are the `pdd` definitions in the param file. `PDDSLMAX` should be set to at least one more than the highest minor number used by a `pdd` statement in the param file. (`PDDSLMAX` is used to calculate the size of a kernel table, and the minor numbers are used to index into that table.) A value of at least 256 is recommended for `PDDSLMAX`. This is needed for the correct operation of the `pddconf(8)` command.

`LDDMAX` represents the maximum number of logical devices allowed. Logical devices are the `ldd` definitions in the param file (and the devices created in the directory `/dev/dsk`). `LDDMAX` should be set at least one

higher than the highest minor number used by an ldd statement in the param file. (LDDMAX is used to calculate the size of a kernel table, and the minor numbers are used to index into that table.)

Validate your changes to the param file by performing the following steps:

1. UNICOS must now be in single-user or multiuser mode. If UNICOS has not been booted, boot to single-user mode now by entering the following command:

```
sn9xxx-ios0> /bin/boot
```

2. On UNICOS, copy the param.disk file from the SPARC console's file system to a UNICOS file, such as /param_test, as follows:

```
# exdf -i /sys/param.disk > /param_test
```

3. To validate the syntax of your param file changes, enter the following command:

```
# /etc/econfig /param_test
```

If the econfig command detects a problem with your configuration file, you must correct that problem **before** continuing with the next step. It also is worthwhile to manually review the changes made to the param_test file at this time, to make sure you have not made any logical errors.

If changes are made to the param_test file while validating it under UNICOS, copy the changed version back to the system console before proceeding by entering the following command:

```
# exdf -ro /sys/param.disk < /param_test
```

4. Return to the IOS prompt (if not already there), and make a backup copy of the existing param file, and then replace it with the newly created version of the param file. Enter the following commands:

```
# <CONTROL-a> (toggles to the IOS console if in single-user mode)
sn9xxx-ios0>
sn9xxx-ios0> cd /sys
sn9xxx-ios0> cp param param.bak
sn9xxx-ios0> cp param.disk param
```

This is the end of the “Software Configuration Preparation” section.

Software Change Procedure

1. Boot UNICOS to single-user mode, with the new param file, by entering the following command:

```
sn9xxx-ios0> /bin/boot
```

2. On UNICOS, use the exdf command to copy the param file from the SPARC console's file system to a UNICOS file, such as /param_test:

```
# exdf -i /sys/param > /param_test
```

3. Create the device nodes for the new disk configuration by entering the following UNICOS commands:

```
# /bin/mv /dev/mkdev.sh /dev/mkdev.sh.bak
# /etc/econfig -d /param_test > /dev/mkdev.sh
# chmod 700 /dev/mkdev.sh
# cd /dev
# rm -f dsk/* pdd/* mdd/* sdd/* ldd/*
# /dev/mkdev.sh
```

4. Create the two new temporary scratch file systems by entering the following commands:

```
# /etc/mkfs -q /dev/dsk/scratcha
# /etc/mkfs -q /dev/dsk/scratchb
```

5. Verify the two new temporary scratch file systems by entering the following commands:

```
# /etc/fsck /dev/dsk/scratcha
# /etc/fsck /dev/dsk/scratchb
```

6. If you are running MLS, use the /etc/labelit command to label the file systems appropriately.

7. Ensure that you can mount the two new scratch file systems by entering the following commands:

```
# /bin/mkdir /scratcha ; chmod 755 /scratcha
# /etc/mount /dev/dsk/scratcha /scratcha

# /bin/mkdir /scratchb ; chmod 755 /scratchb
# /etc/mount /dev/dsk/scratchb /scratchb
```

8. To verify that the upgrade was successful, copy data to the scratch file systems by entering the following commands:

```
# cp /unicos /scratcha/uni1
# cp /unicos /scratcha/uni2
# cp /unicos /scratchb/uni3
# cp /unicos /scratchb/uni4
# cp /unicos /scratchb/uni5
```

Verify that each file is the proper size; then remove these files.

9. Unmount all file systems by entering the following command:

```
# /etc/umountem
```

10. The system can now be booted to multiuser mode or the customer may proceed to the “Disk Device Integration” section. Enter multiuser mode by entering the following command:

```
# /etc/init 2
```

Disk Device Integration

Now that it has been verified that the DDS-30 upgrade has been successful, it is necessary for the customer to integrate these new disks with existing file systems. This requires further editing of the `param` file: the file that was previously edited in this upgrade to create the scratch file systems.

Refer to the *UNICOS Basic Administration Guide for CRAY J90 and CRAY EL Series*, publication number SG-2416, for details. The procedure pages in the File Systems section of that manual describe the necessary steps. The alterations are described both with and without the use of the UNICOS Installation / Configuration Menu System (ICMS). The change procedures outlined in this upgrade document can be used to supplement SG-2416.

NOTE: Create backup copies of any file systems that will be changed in the UNICOS configuration file (`param`).

The changes made to the IOS configuration file and some changes made to the UNICOS configuration file (`param`) in the “Software Configuration Preparation” section should be retained. These include the addition of `eiop` values to the IOS cluster definition and any changes to `PDDSLMAX`, `LDDMAX`, and `PDDMAX` in the UNICOS definition section.

If the UNICOS dump device (called logical device dump in the `param` file) will be moved to one of the new disks, then edit the `/opt/ios/9xx/sys/mfdumpa.arg` file on the system console to reflect this new location. In the `mfdumpa.arg` file, set the `disktype` keyword to be `DD6S`.

NOTE: If your system is running UNICOS 8.0.3.2J, support is not included for configuring the UNICOS dump device (`/dev/dsk/dump`) on a DD-6S device. DD-6S devices are otherwise fully supported in UNICOS 8.0.3.2J. The “`mfdump.DD6S`” getfix package must be applied to systems running the 8.0.3.2J release if `mfdump` support for DD-6S devices is required.

NOTE: The IOS `dstat` command provides an incorrect value for the number of blocks on a DD-6S device in the 8.0.3.2J release. This is fixed in the 8.0.4 release of UNICOS.

Removed Parts Disposition

Do not dispose of removed parts locally; return the removed parts to:

Cray Research, Inc.
1000 Halbleib Road
Chippewa Falls, WI 54729
Attention: Removed Equipment Management

IR Reporting

There is a separate incident report for upgrades. Refer to CSH # ADM-COM-9307. Please fill one out.

