


CRAY Y-MP4 COMPUTER SYSTEM

Model Numbers

CRAY Y-MP4/116, CRAY Y-MP4/132


CRAY Y-MP4/216, CRAY Y-MP4/232

CRAY Y-MP4/416, CRAY Y-MP4/432

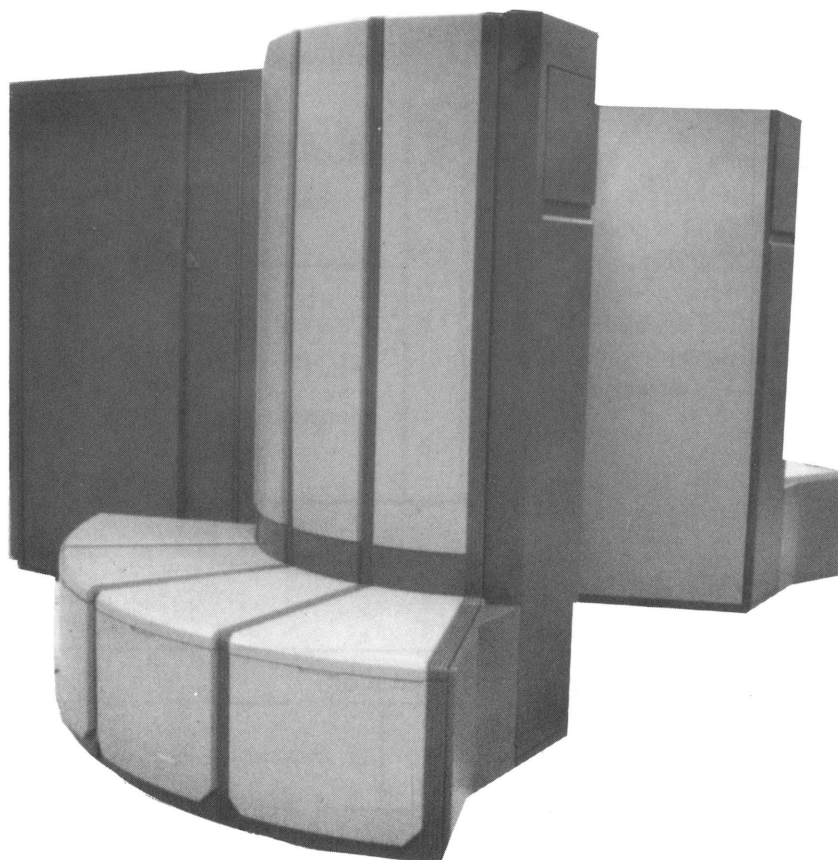

CRAY
RESEARCH, INC.

Specification Sheet
HR-4005

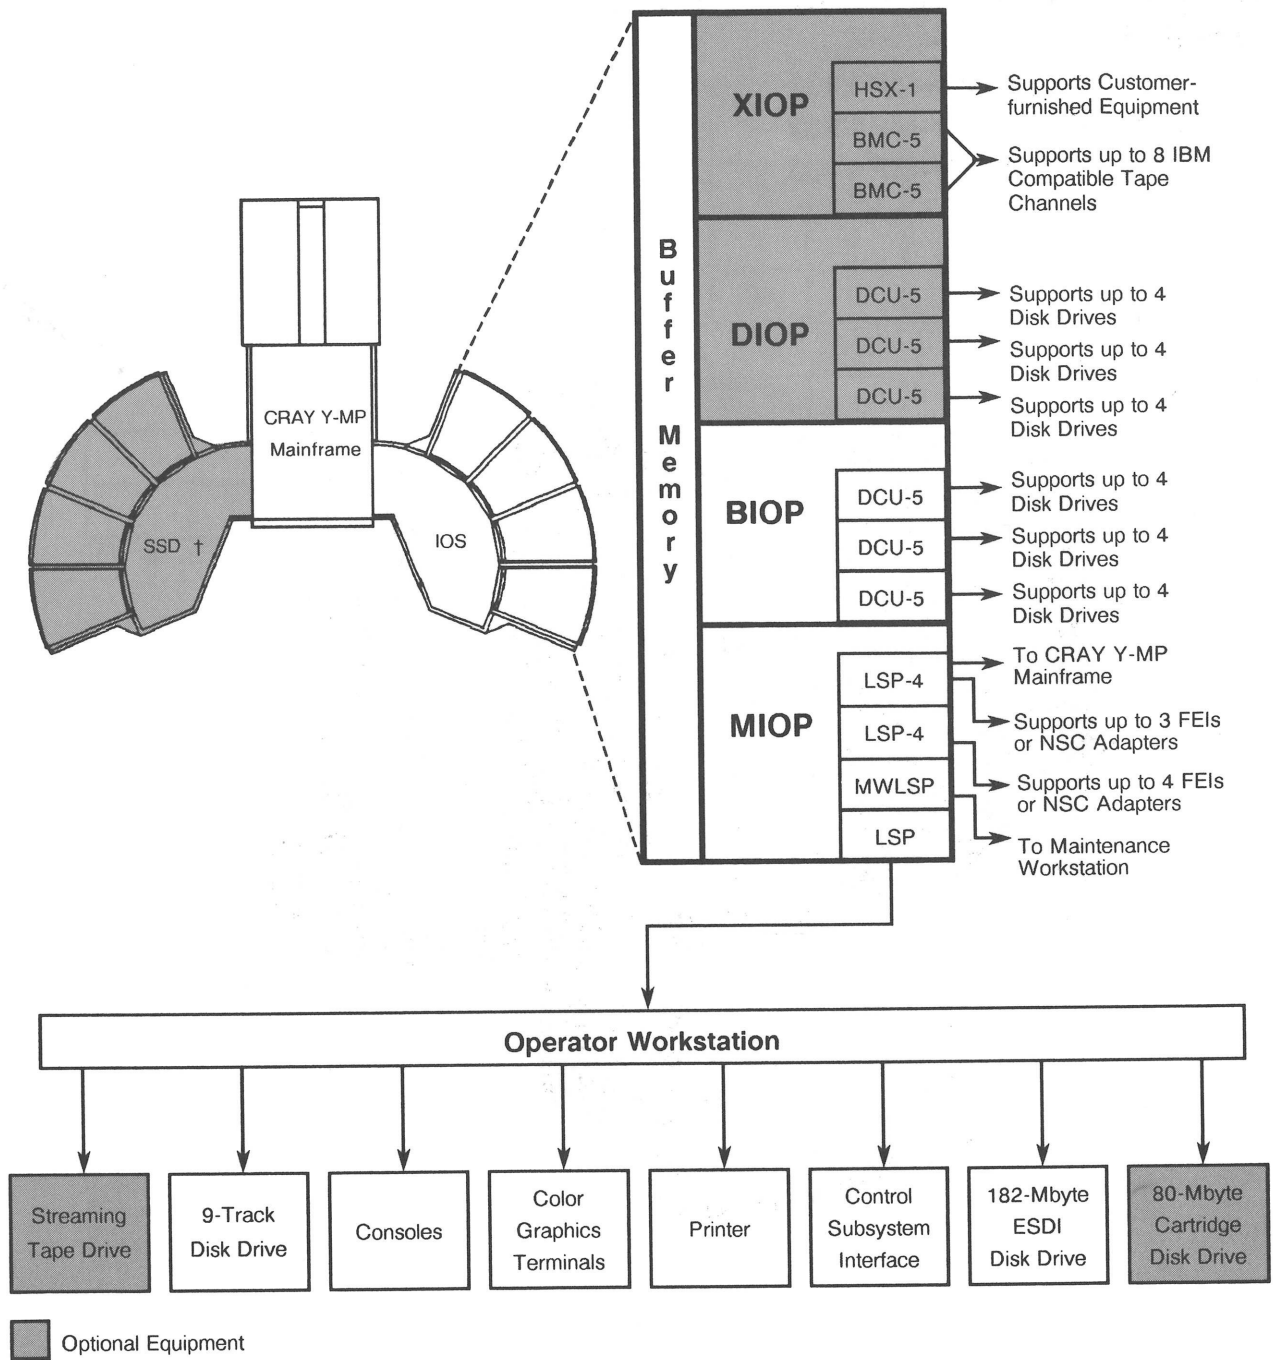

† The CRAY Y-MP4 computer system may be configured with the following model numbers: SSD-31, SSD-51, SSD-5, SSD-6, and SSD-7.

CRAY Y-MP4 Computer System Maximum Configuration

CRAY Y-MP4 SPECIFICATIONS

CRAY Y-MP4 MAINFRAME FEATURES

System Clock

Speed 6.0 ns

CPU Specifications

Number of CPUs 1, 2, 4

Number of registers per CPU:

- Address (A) registers 8
32 bits each (Y-mode),
24 bits each (X-mode) 8
- Intermediate address (B) registers,
32 bits each (Y-mode) 64
24 bits each (X-mode) 8
- Scalar (S) registers, 64 bits each 8
- Intermediate scalar (T) registers,
64 bits each 64
- Vector (V) registers, 64 bits per element,
64 elements per register 8

Number of functional units per CPU:

- Address addition 1
- Address multiplication 1
- Scalar addition 1
- Scalar shift 1
- Scalar logical 1
- Scalar population/parity leading zero 1
- Vector addition 1
- Vector shift 1
- Full vector logical 1
- 2nd vector logical 1
- Floating-point addition 1
- Floating-point multiplication 1
- Floating-point reciprocal approximation . 1

Shared Resources

I/O section:

- 1000-Mbyte/s channels 1, 2
- 100-Mbyte/s channels 1, 2, 4
- 6-Mbyte/s channels 1, 2, 4

Shared Resources (continued)

Central memory:

- Word width 64 bits
- SECDED error correction 8 bits
- Memory size 16, 32 Mwords
- Number of ports per CPU 4
- Number of banks 128
- Number of modules 16

Number of clusters 7

Number of shared registers contained in each cluster:

- Shared address (SB) registers,
32 bits each (Y-mode),
24 bits each (X-mode) 8
- Shared scalar (ST) registers,
64 bits each 8
- Semaphore (SM) registers,
1 bit each 32

Real-time clock (64 bits) 1

PHYSICAL DESCRIPTION

Floor space 16 ft² (1.5 m²)
Weight 5,400 lbs (2,450 kg)
Height 6.4 ft (1.9 m)

SUPPORT EQUIPMENT

Refrigeration condensing unit 1
Motor-generator sets 1
Operator workstation 1
Maintenance workstation 1
Heat exchanger unit 1

For individual CRAY Y-MP4 model specifications, refer to the table on the following page.

CRAY Y-MP4 MODEL SPECIFICATIONS

Specifications	Models					
	416	432	216	232	116	132
Number of CPUs	4	4	2	2	1	1
Number of Clusters	7	7	7	7	7	7
Memory Size (Mwords)	16	32	16	32	16	32
Number of I/O Channels:						
1000-Mbyte/s Channels	2	2	1	1	1	1
100-Mbyte/s Channels	4	4	2	2	1	1
6-Mbyte/s Channels	4	4	2	2	1	1

Copyright © 1989 Cray Research, Inc. This document or parts thereof may not be reproduced in any form unless permitted by contract or by written permission of Cray Research, Inc.

CRAY, CRAY-1, SSD, and UNICOS are registered trademarks and CFT, CFT77, CFT2, COS, Cray Ada, CRAY-2, CRAY X-MP, CRAY X-MP EA, CRAY Y-MP, CSIM, Delivering the power . . . , HSX, IOS, SEGLDR, and SUPERLINK are trademarks of Cray Research, Inc.